

LUXLITE® T8 Ballast Specifications

Instant Start(120/230V) -Normal Light Output

THD<10%,PF>0.98, 50/60Hz

Lamp Type	Lamp Watt	# of Lamps	Model	Line Volt(V)	Input Watt(W)	Input Current(A)	Ballast Factor(%)	Weight (Grams)
T8	32W	1	PMXT8-32-1	120	32	0.26~0.28	90	210
T8	32W	1	PMXT8-32-1	230	32	0.13~0.15	90	210
T8	32W	2	PMXT8-32-2	120	60	0.46~0.51	90	210
T8	32W	2	PMXT8-32-2	230	59	0.25~0.27	95	210
T8	40W	2	PMXT8-40-2	120	78	0.63~0.65	90	210
T8	40W	2	PMXT8-40-2	230	78	0.32~0.34	90	210
T8	59W	2	PMXT8-59-2	120	115	0.97~0.99	90	210
T8	59W	2	PMXT8-59-2	230	115	0.50~0.52	90	210


LUXLITE® T5 Ballast Specifications

Preheat Start(120/230V) -Normal Light Output

THD<10%,PF>0.98, 50/60Hz

Lamp Type	Lamp Watt	# of Lamps	Model	Line Volt(V)	Input Watt(W)	Input Current(A)	Ballast Factor(%)	Weight (Grams)
T5	28W	1	PMXT5-28-1	120	27	0.22~0.24	90	210
T5	28W	1	PMXT5-28-1	230	27	0.11~0.13	90	210
T5	28W	2	PMXT5-28-2	120	54	0.4~0.5	90	210
T5	28W	2	PMXT5-28-2	230	54	0.22~0.24	90	210
T5	54W	1	PMXT5-54-1	120	53	0.44~0.46	90	210
T5	54W	1	PMXT5-54-1	230	53	0.46~0.48	90	210
T5	54W	2	PMXT5-54-2	120	105	0.23~0.25	90	210
T5	54W	2	PMXT5-54-2	230	105	0.46~0.48	90	210

Dimensions

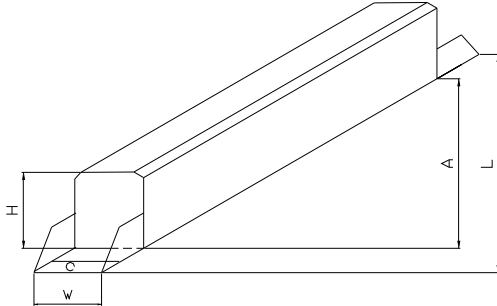

Length(L) Width(W) Height(H) Body(A)

359mm

30mm

29mm

303mm

Wiring

For T8 ballast

For T5 ballast

